

# ECOPHON® AKUSTO™ WALL C TEXONA


Wall Panels  
Fiberglass

Smooth fabric surface envelopes fiberglass panel and offers outstanding sound performance.



## APPLICATIONS


- Open Plan Offices
- Classrooms
- Libraries
- Conference Rooms
- Other Commercial Buildings / Space Applications

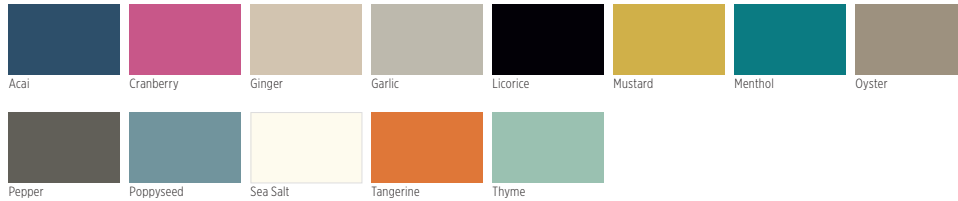

## FEATURES AND BENEFITS

- Smooth, Texona fabric surface texture
- Use as a complement and/or alternative to acoustical ceiling panels for excellent performance within a space
- Available in 13 colors
- Moisture resistant

## EDGE DETAILS



Kerfed Edge

## LEED® v4

RECYCLED CONTENT 71%

|                                     |   |
|-------------------------------------|---|
| <input type="checkbox"/>            | EA: Optimize Energy Performance                           |
| <input type="checkbox"/>            | EA: Prereq. Min. Energy Performance                       |
| <input type="checkbox"/>            | EQ: Interior Lighting                                     |
| <input checked="" type="checkbox"/> | MR: PBT Source Reduction (Healthcare)                     |
| <input checked="" type="checkbox"/> | EQ: Acoustic Performance                                  |
| <input checked="" type="checkbox"/> | EQ: Prereq. Min. Acoustic Performance (Schools)           |
| <input checked="" type="checkbox"/> | EQ: Low-Emitting Materials                                |
| <input type="checkbox"/>            | EQ: Daylight  |
| <input type="checkbox"/>            | MR: Material Ingredients (HPDs)                           |
| <input checked="" type="checkbox"/> | MR: Sourcing Raw Materials                                |
| <input checked="" type="checkbox"/> | MR: Environmental Product Declarations (EPDs)             |
| <input checked="" type="checkbox"/> | MR: Construction and Demolition Waste Management Planning |

EPD®

EPD Available

**CertainTeed**  
SAINT-GOBAIN

Customer Support | [certainteed.com/ceilings](http://certainteed.com/ceilings) | 800-233-8990

# ECOPHON® AKUSTO™ WALL C TEXONA

Wall Panels  
Fiberglass

All products in this line feature these attributes:



MOLD RESISTANT INHERENT



LR 0.05 - 0.81



EPD AVAILABLE




EMISSION COMPLIANT CERTIFIED










RECYCLED CONTENT 71%

## AKUSTO WALL C TEXONA PANELS

| WALL PANEL  | Color            | Dimensions mm (in.)                                  | NRC  | LR   | Recycled Content | Pieces/carton | Sq. m (Ft.) / carton | Lbs. / carton |
|---|------------------|--|------|------|------------------|---------------|----------------------|---------------|
|  | <b>3557 1002</b> | Garlic<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)    | 0.95 | 0.52 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1004</b> | Pepper<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)    | 0.95 | 0.17 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1005</b> | Licorice<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)  | 0.95 | 0.05 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1011</b> | Ginger<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)    | 0.95 | 0.56 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1012</b> | Tangerine<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2) | 0.95 | 0.27 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1050</b> | Menthol<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)   | 0.95 | 0.18 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1051</b> | Mustard<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)   | 0.95 | 0.45 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1056</b> | Oyster<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)    | 0.95 | 0.32 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1060</b> | Sea Salt<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)  | 0.95 | 0.81 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1063</b> | Cranberry<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2) | 0.95 | 0.15 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1064</b> | Acai<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)      | 0.95 | 0.11 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1065</b> | Thyme<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2)     | 0.95 | 0.47 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |
|   | <b>3557 1066</b> | Poppyseed<br>2700 x 600 x 40<br>(≈ 106 x 24 x 1-1/2) | 0.95 | 0.28 | 71%              | 4             | 21.3<br>(≈ 70)       | 71            |

## ACCESSORIES

| AKUSTO WALL C TEXONA ACCESSORIES  | Product Name   | Pieces/carton | Use   |
|---|--|---------------|---|
|  | <b>2630 0214</b> Connect Fixing Bracket                | 260           | For direct fixing of Connect WP Profile to structure                                      |
|  | <b>2631 1050</b> Connect WP Space Bar (Galvanized)     | 10            | For use in conjunction with WP Profile when Akusto Wall C panels are installed vertically |
|  | <b>2631 1051</b> Connect WP Profile Connect (White 03) | 8             | Installed on walls and provides channel into which Akusto Wall C panels are inserted      |
|  | <b>2631 1052</b> Connect WP Profile (Natural 02)       | 8             | Installed on walls and provides channel into which Akusto Wall C panels are inserted      |
|  | <b>2631 1074</b> Connect WP Profile (Black 01)         | 8             | Installed on walls and provides channel into which Akusto Wall C panels are inserted      |
|  | <b>2631 1057</b> Connect WP External Corner (White 03) | 4             | Used in conjunction with WP Profile to create 90 degree outside corners                   |
|  | <b>2631 1058</b> Connect WP External Corner (Grey 02)  | 4             | Used in conjunction with WP Profile to create 90 degree outside corners                   |

# ECOPHON® AKUSTO™ WALL C TEXONA

Wall Panels  
Fiberglass

## ACCESSORIES

| AKUSTO™ WALL C TEXONA ACCESSORIES (continued)                                       | Product Name  | Pieces/carton | Use  |
|---|---|---------------|--|
|    | <b>26311059</b> Connect WP External Corner (Black 01)                             | 4             | Used in conjunction with WP Profile to create 90 degree outside corners                            |
|    | <b>2630 0933</b> WP Profile Splice  | 4             | For use when running multiple lengths of WP Profile end-to-end                                     |
|    | <b>2630 0219</b> Connect Spline (Black)   | 100           | For use in the kerf between Akusto Wall C panels when they are installed vertically                |
|    | <b>2630 0299</b> Connect Direct Fixing Plate (Akusto Wall C)                      | 100           | For direct fixing of Akusto Wall C panels when they are installed horizontally                     |
|    | <b>2630 0976</b><br><b>2630 0970</b><br><b>2630 0971</b> Connect Thinline Profile | 8             | Installed on walls and provides channel into which Akusto Wall C panels are inserted               |
|    | <b>2630 0977</b><br><b>2630 0965</b><br><b>2630 0966</b> Connect Thinline Corner  | 4             | Used in conjunction with Thinline Profile to create 90 degree outside corners                      |
|    | <b>26311632</b> Connect Ambit Fixing  | 100           | Galvanized steel. For fixing industry Ambit and support for Akusto Wall C in Thinline installation |
|  | <b>2630 0932</b> Connect Thinline Splice  | 4             | For use when running multiple lengths of Thinline profile end-to-end.                              |

## PHYSICAL DATA

**MATERIAL**  
Fiberglass

**FIRE CLASS (ASTM E1264)**  
Tested according to ASTM E84 & CAN S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

**VOC EMISSIONS**  
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

**Mold/Mildew Resistance**  
Fiberglass substrate is inherently resistant to the growth of mold and mildew.

**MAINTENANCE**  
Wipe with a soft cloth or vacuum with brush attachment.

**WARRANTY**  
10-year Ecophon Warranty.  
Full warranty information can be found at [certainteed.com/ceilings](http://certainteed.com/ceilings).