

# SUBMITTAL SHEET

# TAVOLA™ LEVELS

Project Name \_\_\_\_\_

Specification Section \_\_\_\_\_

Ceiling Type \_\_\_\_\_

**SUBSTRATE:** **ALUMINUM**       .032"     .040"     Other (consult with manufacturer)

**CONFIGURATIONS**       Wave       Step       Chippy       Other - Provide specific beam  
 Barcode     Stagger     Scatter      sizes and configuration

**BEAM SPACING**       4"       6"       8"       Other \_\_\_\_\_

**COLOR/FINISH**       Cotton White - #0280  
 Natural - #7163  
 Other # \_\_\_\_\_

**PERFORATION PATTERN**       #106     #115     #119     Other \_\_\_\_\_     Non-Perforated

**NUMBER OF SIDES PERFORATED**       Two sides only  
 Three sides

**ACOUSTICAL BACKER**       Black Non-Woven  
 Black Polywrapped Pad  
 None

**ACOUSTICAL RATING**      \_\_\_\_\_ (NRC)  
\* Adding acoustical material may require two-piece construction.  
Please contact manufacturer for more information.

**END CAPS**       Yes       No

**GRAIN DIRECTION**       Horizontal     Vertical  
(For Decorated End Caps)

**EXPOSURE**       Interior Only

Shop Drawings required on all Tavola™ projects


**To Contact Us:**  
5015 Oakbrook Parkway, Suite 100  
Norcross, GA 30093  
phone: 800.366.4327  
fax: 770.806.0214  
www.certainteed.com/architectural

ARCHITECTURAL

**CertainTeed**  
SAINT-GOBAIN

## PERFORATIONS

Perforated panels improve acoustical performance as well as create aesthetic effects. Perforations not available on laminated (film).

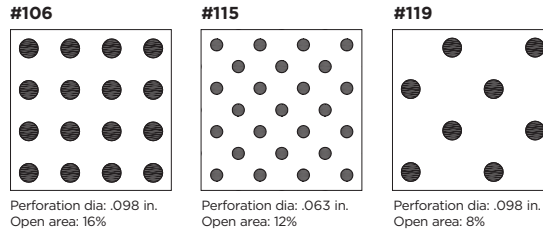

## ACOUSTICAL BAFFLE TEST RESULTS

- 2" x 6" Perforated Baffle Beam - Spacing 6" o.c.
- 2" x 8" Perforated Baffle Beam - Spacing 8" o.c.
- 2" x 10" Perforated Baffle Beam - Spacing 10" o.c.
- 2" x 12" Perforated Baffle Beam - Spacing 12" o.c.
- 2" x 15" Perforated Baffle Beam - Spacing 15" o.c.

Perforation Pattern	Acoustical Infill	2" x 6"		2" x 8"		2" x 10"		2" x 12"		2" x 15"	
		Apparent		Apparent		Apparent		Apparent		Apparent	
		NRC	SAA	NRC	SAA	NRC	SAA	NRC	SAA	NRC	SAA
106	Non-Woven plus 1.5", 1.5 pcf fiberglass	1.00	1.00	*	*	*	*	*	*	*	*
106	Non-Woven plus 1.5", 1.5 pcf black poly encapsulated fiberglass	1.00	0.95	*	*	*	*	*	*	*	*
106	Non-Woven plus 1.5", 3.0 pcf black poly encapsulated fiberglass	1.00	0.96	*	*	*	*	*	*	*	*
106	Non-Woven	0.60	0.59	*	*	*	*	*	*	*	*
115	Non-Woven plus 1.5", 1.5 pcf black poly encapsulated fiberglass	1.10	1.09	1.10	1.11	1.15	1.16	1.15	1.16	1.20	1.21
115	1.5", 1.5 pcf black poly encapsulated fiberglass	1.05	1.05	1.05	1.04	1.10	1.11	1.10	1.09	1.15	1.16
115	Non-Woven plus 1.5", 3.0 pcf black poly encapsulated fiberglass	1.00	1.00	*	*	*	*	*	*	*	*
115	Non-Woven	0.70	0.69	0.60	0.61	0.75	0.73	0.75	0.74	0.75	0.75
119	Non-Woven plus 1.5", 1.5 pcf black poly encapsulated fiberglass	1.00	0.98	1.05	1.07	1.15	1.12	1.10	1.10	1.15	1.15
119	1.5", 1.5 pcf black poly encapsulated fiberglass	1.00	0.94	1.05	1.03	1.10	1.08	1.05	1.04	1.10	1.11
119	Non-Woven plus 1.5", 3.0 pcf black poly encapsulated fiberglass	0.90	0.94	*	*	*	*	*	*	*	*
119	Non-Woven	0.60	0.58	0.60	0.60	0.75	0.73	0.75	0.76	0.75	0.73

Acoustical tests performed in accordance with ASTM C423 and ASTM E795, with mounting type "J". Test reports available upon request.

\* Not tested

## PHYSICAL DATA

**Substrate:** Aluminum

**Warranty:** 1 year Limited Warranty

**Seismic rating:** Zones A,B,C,D,E,F

**Fire rating:** Class A Fire Rated per ASTM E84

- Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
- Film on metal: Flame spread: ≤ 25, Smoke ≤ 50

Class A Fire Rated per CAN/ULC-S102

- Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50

**Weight:** Varies 0.5 - 2.0 lbs./sq.ft.

**Wind load:** N/A

**Recycled content:** Up to 85%

**Light reflectance (LR) Coefficient per ASTM E1264 & ASTM E1477:**

- Cotton White: LR = 0.81