

# SUBMITTAL SHEET

# TAVOLA™ ROUND

Project Name \_\_\_\_\_

Specification Section \_\_\_\_\_

Ceiling Type \_\_\_\_\_

**SUBSTRATE:**  .040"  
**ALUMINUM**

**BEAM PROFILES**  1-9/16" x 2-1/2"  1-9/16" x 6"  1-9/16" x 10"  
(Width x Height)  1-9/16" x 3"  1-9/16" x 7"  1-9/16" x 11"  
 1-9/16" x 4"  1-9/16" x 8"  1-9/16" x 12"  
 1-9/16" x 5"  1-9/16" x 9"  Other \_\_\_\_\_

**BEAM SPACING**  4"  6"  8"  Other \_\_\_\_\_

**COLOR/FINISH**  Cotton White - #0280  
 Natural - #7163  
 Other \_\_\_\_\_

**PERFORATION PATTERN**  #106  #115  #119  Other \_\_\_\_\_  Non-Perforated

**NUMBER OF SIDES PERFORATED**  One side  
 Two sides

**ACOUSTICAL BACKER**  Black Non-Woven  
 Black Polywrapped Pad  
 None

**END PLUGS**  Yes  No

**GRAIN DIRECTION**  Horizontal  Vertical  
(For Decorated Wood-Look End Plugs)

**EXPOSURE**  Interior Only

Shop Drawings required on all Tavola™ projects.


**To Contact Us:**  
5015 Oakbrook Parkway, Suite 100  
Norcross, GA 30093  
phone: 800.366.4327  
fax: 770.806.0214  
www.certainteed.com/architectural

ARCHITECTURAL

**CertainTeed**  
SAINT-GOBAIN

**PERFORATIONS**

Perforated panels improve acoustical performance as well as create aesthetic effects.

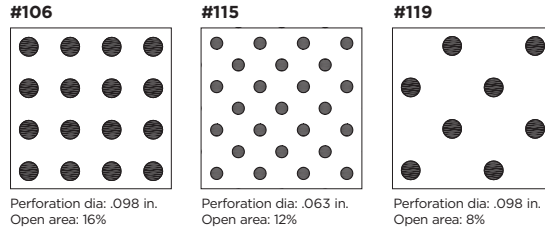

**PHYSICAL DATA**

- Substrate:** Aluminum
- Warranty:** 1 year Limited Warranty
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E84
  - Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
- CAN/ULC-S102
  - Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50
- Weight:** Varies 0.5 - 2.0 lbs./sq.ft.
- Wind load:** N/A
- Recycled content:** Up to 85%
- Light reflectance (LR) Coefficient per ASTM E1264 & ASTM E1477:**
  - Cotton White: LR = 0.81